




APLICAÇÕES



PEÇAS DE SUBSTITUIÇÃO

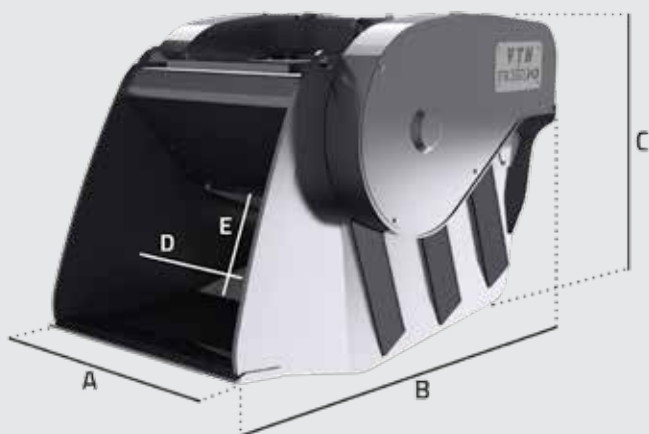

OPCIONAL



MODEL		FB150 HD	FB250 HD	FB300 HD	FB350 HD	FB500 HD
A	mm	740	900	1030	1130	1420
B	mm	1800	2050	2050	2150	2250
C	mm	1100	1330	1330	1400	1450
D	mm	600	700	820	920	1220
E	mm	450	500	500	500	550
	m3	0,50	0,60	0,65	0,70	1,05
	l/min	90/100	130/140	130/140	170/180	250/300
	bar	270	300	300	300	300
	kg	1670	2720	3070	4220	5680
	ton	12/16	16/24	19/24	24/40	35/55
Placas anti-desgaste intercambiáveis				✓	✓	✓



SERIE FB

Balde Britador:

- Disponível em 5 modelos para máquinas de 12 a 55 Ton.
- Granulometria do material ajustável de 18mm a 130mm.
- Mandíbula com movimento de trituração excêntrico.
- Placas anti-desgaste intercambiáveis.
- Mandíbulas intercambiáveis.
- Potente motor de pistons.
- Sistema de lubrificação central.



www.cce-sondametal.com

Carvalho, Coimbra & Esteves, Lda

Rua da Formiga Nº2 – Faião

2705-839 Terrugem – Sintra

Telf.: 219 617 442 / 43

210 998 087 / 190

Fax: 219 617 445

Email: cce@cce-sondametal.com



DESPERDICIOS
DE OBRA



PEDRA

